

atacama



Flysheet: RIP-STOP PU polyester
"UV Resistant" (3000 mm H₂O)

Sleeping area: polyamide

Floor: PE fabric (10,000 mm H₂O)

Frame: fiberglass FG fi 8.5 mm
option: aluminium 7001 T6 fi 9.5 mm

Pins: aluminium 7001 T6


Seams: all taped

Tent capacity: 2-3 persons

Weight: 4.3 kg / alu option : 3.9 kg

[dimensions: 415 x 175 x 115 cm]

GUARANTEE: 2 YEARS



Made in Poland

SETTING UP THE TENT


Spread out the tent on the ground, not necessarily in the place where you want to set it.
Do not fix it with pins to the ground! Fasten the zippers.

Insert assembled frame poles into the sleeve of the flysheet (Fig. 1).
Insert the longest frame pole (marked) into the middle sleeve.


Bend the frame poles by inserting pins into their ends (Fig. 2. - arrow)
Tent prepared as described above should be set at the desired location and fixed to the ground with pins.
Use the free end of the tensioning tape near the snap buckles to adjust the tension of the flysheet. (Fig. 3 - arrow).

COMPONENTS:

flysheet and sleeping area cover (integrated)
frame (3 frame poles)
aluminium pins (17)
guy lines (6)
bag,
manual,
guarantee



Note: Setting up the tent does not require guy lines. They may be used optionally as an additional safety measure

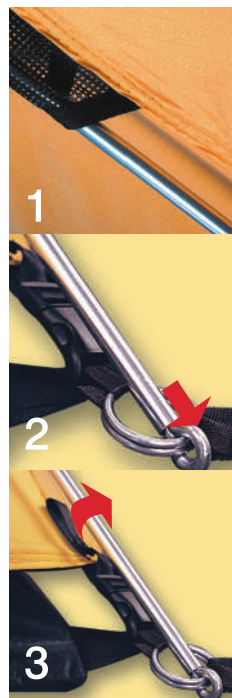

2-3 OSOBY



4,3 kg



3000 mm H₂O



ø 8,5 mm



3,9 kg



ALUMINIUM



UV RESISTANT



POLYESTER RIP-STOP



3000 mm H₂O



UV RESISTANT



POLYESTER RIP-STOP



3000 mm H₂O



UV RESISTANT



POLYESTER RIP-STOP



3000 mm H₂O



UV RESISTANT

* opcja



MARABUT
Spółka z o.o.

32-070 Czernichów 451
tel.: (012) 270-24-24
fax: (012) 270-24-40
e-mail: biuro@marabut.pl
www.namioty.pl